


CAROLINA TRAILERS & EQUIPMENT



50 Ton, 3 Axle Detachable Gooseneck, Non-Ground Bearing Lowboy (Maximum Capacity 100,000#. Shipping Weight of 20,700 lbs. +/- 3%)

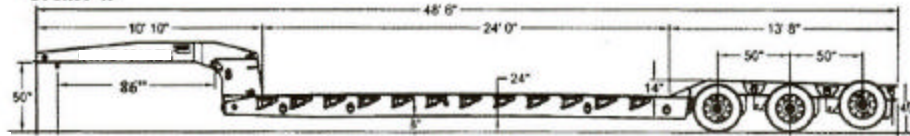

Dimensions:

Overall Length: 49' 9"

Overall Width: 8' 6"

Load well Length: 24'

Load well Height: 20"

Frame:

Main Beam: 12" Fabricated, T-1 I-Beam with 3" camber

Cross Members: 8" & 4" on 12" centers

Side Rails: 12" Fabricated, T-1 I-Beam with 3" camber.

Rear Axles:

3-25,000 lbs capacity axles (3rd axle lift)

King Pin:

2" heavy duty.

Tires:

12 each 255/70R x 22.5 "H" load range, PSI 120 KPA 830 steel belted radials.

Wheels:

12 each 8.25" x 22.5", 10 hole hub piloted steel disc wheels.

Brakes:

16.5" x 7" air brakes with spring parking brakes, automatic slack adjusters and ABS system.

Suspension:

Ridewell air ride suspension with height control valve.

Front Ramps:

Front loading ramps with grousers.

Electrical:

12-Volt electrical system with standard 7 way SAE connector all lighting LED sealed in rubber grommet mounting to DOT specifications.

Hydraulics:

Wet line hook-up for tractor PTO operation.

Decking:

1 3/4" Rumber flooring, secured to frame with 5/16" self-taping torque screws.

Outriggers:

20 each cast steel lock-in-lock out 10 each side.

Tie Downs:

3/4" "D" ring tie downs.

Finish:

Sandblasted to near white, primed with 2 top coats, and choice of colors.

Available Options for 50-Ton Detach

- Available in Ground-Bearing.
- Additional Lengths/Widths.
- Gooseneck: Additional Swing Clearance.
- Power Pack Hydraulics: 11hp-16hp Honda, Combo Power Pack/Wet Line Kit.
- Lockable Toolbox & Chain Storage.
- Spare Tire & Wheel: 255/70 x 22.5 "H".
- Rear Deck: Steel Wheel Covers or Rumber Covered.
- Decking: Apitong, Oak & Pine.
- Ramps: Hydraulic w/3' Beaver Tail.
- 4th Axle Flip, Air & Electrical.

